


# Desktop Single-sided Card Printer



## S26



Front

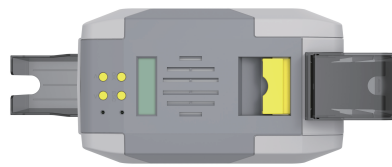

Top



Back

SEAORY S

### Lightweight Body, Reliable Quality

Adopt thermal dye-sublimation printing technology with high definition  
With better card printing capability continuously, saving-time effort  
Simple operation interface and easy to use  
Lightweight body and easy to maintain  
Low noise in printing process  
High printing speed engine

### Features

Available to set the direction of card input & output  
Automatic single-sided card printing  
Support manual card feeding  
Support sensor for no card and defective card slot

### Consumables


Full panel YMCKO ribbon: 100 prints/roll, 300 prints/roll  
1/2 panel ymckOKO ribbon: 250 prints/roll  
1/2 panel ymckO ribbon: 450 prints/roll  
Black ribbon: 100m×60mm, 200m×60mm  
Monochrome ribbon (gold/silver/white/red/blue): 100m×60mm  
KO ribbon: 500 prints/roll  
Anti-counterfeit Invisible UV ribbon: 100m×60mm

### Optional Multi-function modules

Dual interface chip card encoding module  
Contactless ID card encoding module  
UHF chip card encoding module  
Magnetic stripe card encoding module



With high definition photo effect which printed by dye sublimation technology

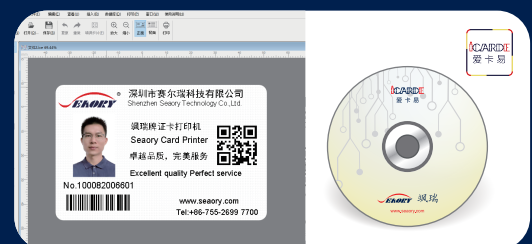

Come with professional printing software

## Technical Parameter

<b>Model</b>	S26/Desktop Single-sided Card Printer
<b>Specifications</b>	293 × 174 × 211.6 (mm), 3.9Kg without input and output hopper
<b>Interfaces</b>	USB & Ethernet
<b>Input Capacity</b>	100 cards
<b>Output Capacity</b>	50 cards
<b>Print Speed</b>	Monochrome printing: 3~5s per card(single-sided); Full-color(YMCKO) printing: 18s per card(single-sided)
<b>Card Material</b>	PVC / Composite PVC
<b>Power</b>	AC 100~240V, 50/60 Hz, DC 24-25.5V, 2.7 A
<b>Print Dimension</b>	ISO CR80 (53.98mm×85.60mm), edge-to-edge printing
<b>Print Resolution</b>	300dpi × 300dpi, 300dpi × 600dpi, 300dpi × 1200dpi
<b>Memory</b>	128MB
<b>Print Method</b>	Dye sublimation (Direct-to-Card)
<b>Card Thickness</b>	0.3-1.05mm
<b>LCM Display</b>	Chinese: 8 characters per line, 2 lines / English: 16 characters per line, 4 lines / support multi-language
<b>Operation System</b>	<p><b>Driver:</b> Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other Made-in-China operating systems.</p> <p><b>SDK:</b> Support Windows XP/7/8/10/11, Windows Server 2003/2008/2012/2016, Linux, and NeoKylin, Kylin, UOS and other Made-in-China operating systems</p> <p>Card Design Software: iCARDE card design software, support Windows XP/7/8/10/11 operating systems</p>
<b>Warranty</b>	Card printer : 24 months (artificial damage excluded) / Print head: Replace one for free within 1 year (artificial damage excluded)
<b>Operating Condition</b>	<p>1. Regular running temp.: 15°C-30°C(59-86°F), 20%~65% RH non-condensing</p> <p>2. Lowest / Highest running temp.: 0°C(32°F) / 40°C(104°F), 20%~65% RH non-condensing</p>
<b>Storage Condition</b>	Temp.: -5°C-70°C(23-158°F), 20%~70% RH non-condensing
<b>Certificates</b>	CCC, FCC, CE, ROHS, UKCA

